

# BRT SERIES

## Non-Powered Turntables

BRT series is provided with a standard forklift tube base for ease of transporting to the site where it is needed. Bolt-down flanges and a removable 1 3/8" center stub shaft. Ideal for material pay-out from damaged reels.



BRT5 shown above

---

**REELOMATIC**<sup>®</sup>

The Leader in Reeling, Coiling & Processing Solutions

6408 S. Eastern Avenue | Oklahoma City, OK. 73149  
405.672.0000 | 405.672.7200 Fax  
[www.reelomatic.com](http://www.reelomatic.com)

# BRT SERIES

## Non-Powered Turntables

### **Standard Capacities:**

BRT2 24" dia. x 2,000 lbs.

BRT5 48" dia. x 5,000 lbs.

BRT10 60" dia. x 10,000 lbs.

BRT15 72" dia. x 15,000 lbs.

### **Standard Features:**


- Heavy Duty Structural Steel Top
- Safety Skirt
- Forklift Base
- Centering Stub Shaft

### **Options:**

- Adjustable Tension Brake
- Top Modified to Accommodate Adjustable Coil ID Pins
- Various Size Stub Shaft Adapters
- Top Hat for Coiled Material Pay-Out
- Custom Specifications and Sizes Available



**BRT5 with ID Pins  
and Brake**

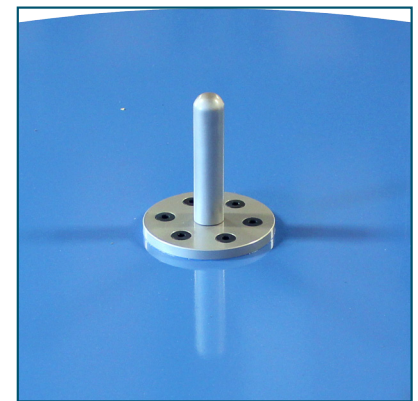

**Centering Stub Shaft**