

HSS SERIES

High Speed Spooler and Coiler

Standard Features

- Capacity 24" diameter x 12" wide x 150 LBs
- Dynamic Braking Feature
- V-Belt Drive
- Remote Safety Foot Switch
- Speed Control Potentiometer
- Illuminated on/off power switch
- 3/8 Inch Drive Pin
- 3/4 diameter Plug in Shaft standard with quick lock collar
- Right or left hand configuration available



| Models | AC Drive HP | RPM | Payoff Reel |
|------------|-------------|-------|-------------|
| 751 | 1 HP | 0-650 | 500 LB |
| 752 | 2 HP | 0-650 | 1,000 LB |
| 753 | 3 HP | 0-650 | 1,500 LB |

* When purchased in coiling format it is 0-100 RPM.

REELOMATIC[®]

The Leader in Reeling, Coiling & Processing Solutions

6408 S. Eastern Avenue | Oklahoma City, OK. 73149
405.672.0000 | 405.672.7200 Fax
www.reelomatic.com

HSS SERIES

High Speed Spooler and Coiler




Options:

- Coiler - Steel/Aluminum
- Safety Guarding
- Forward/Reverse Option
- Spooler/Coiler Combination Format
- Various Plug in Shafts
- Hour Meter
- Automatic Levelwind System
- Quick disconnect feature for Plug - in shaft or coiler



UL Certified Panel Box

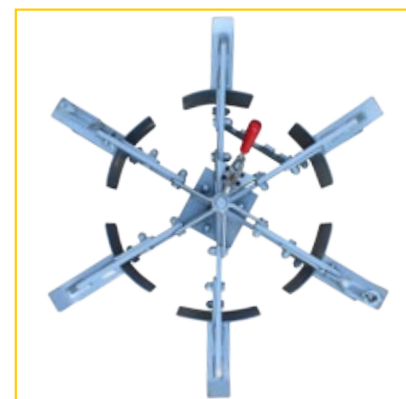

5C Collapsible Coiler



Automatic Levelwind System

REEL  **MATIC**®

The Leader in Reeling, Coiling & Processing Solutions

6408 S. Eastern Avenue | Oklahoma City, OK. 73149
405.672.0000 | 405.672.7200 Fax
www.reelomatic.com