


ILRSP

In-Line Reeling and Coiling Stationary Pay-Out

Shafted and Shaftless Machines for Process Line Speed Synchronization.

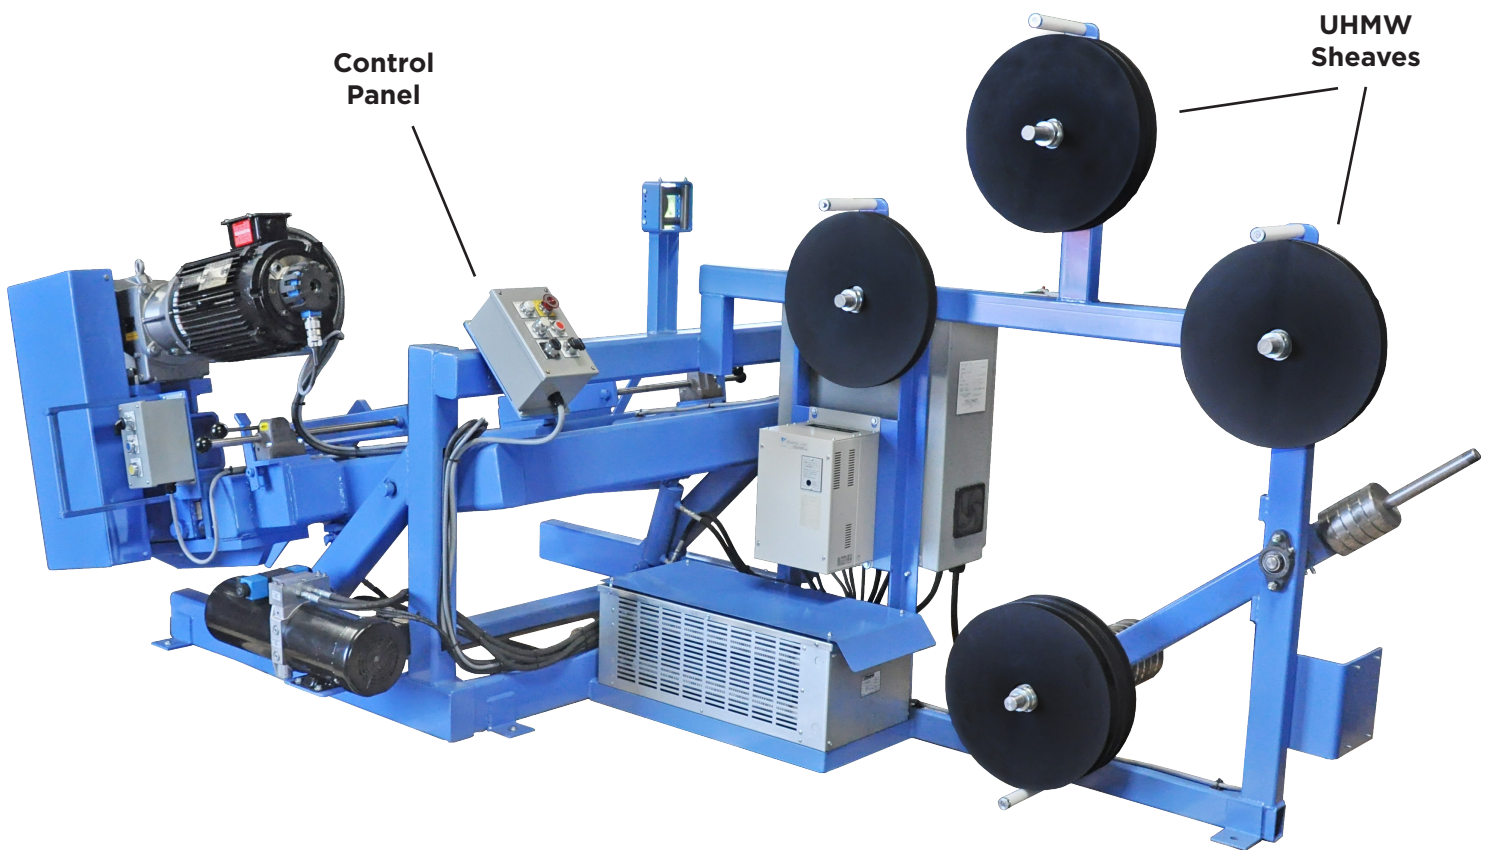

Shown above ILRSP2

REELMATIC[®]

The Leader in Reeling, Coiling & Processing Solutions


6408 S. Eastern Avenue | Oklahoma City, OK. 73149
405.672.0000 | 405.672.7200 Fax
www.reelomatic.com

In-Line Reeling and Coiling Stationary Pay-Out

PAY-OUT

Standard Features

- HD Frame with Bolt Down Tabs
- Variable Speed SCR Drive System
- 10" Dia. UHMW Guide Sheaves
- Manual Hydraulic Lift Jack

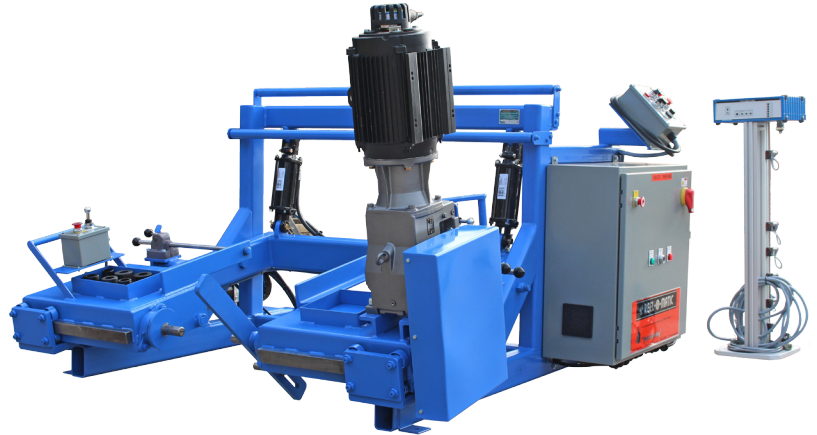

ILRSP 2.5 With Electronic Dancer


Standard Reel Sizes

ILRSP2 20" 48" dia. x 36" Wide x 2,000 lbs.

ILRSP3 20" 54" dia. x 38" Wide x 3,000 lbs.

ILRSP4 20" 60" dia. x 38" Wide x 4,000 lbs.

ILRSP5 20" 72" dia. x 48" Wide x 5,000 lbs.

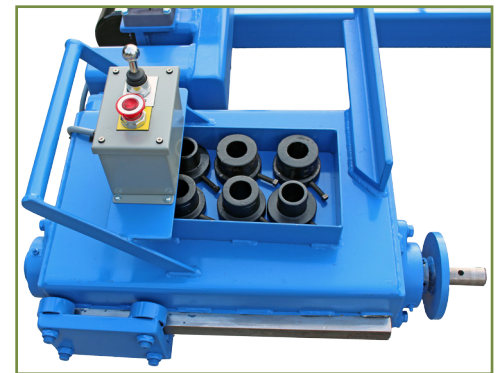

Manual Shaftless Feature

Options

- Mobile Design
- Manual Shaftless Feature
- Electrolift
- Dual Front Mounted Loading Controls
- Large Guide Sheaves
- Slide Drive
- Non-Contact Dancers



Local Control Station

**Consult Us About Your Special Applications*