


POWERED REEL ROLLERS

PRR Series

The PRR Series was created for use in extrusion, assembly and inspection processes or where minimum floor space usage is required. The PRR may be easily loaded by utilizing the loading ramp, overhead crane, or with a forklift and is available with options to fit your application.

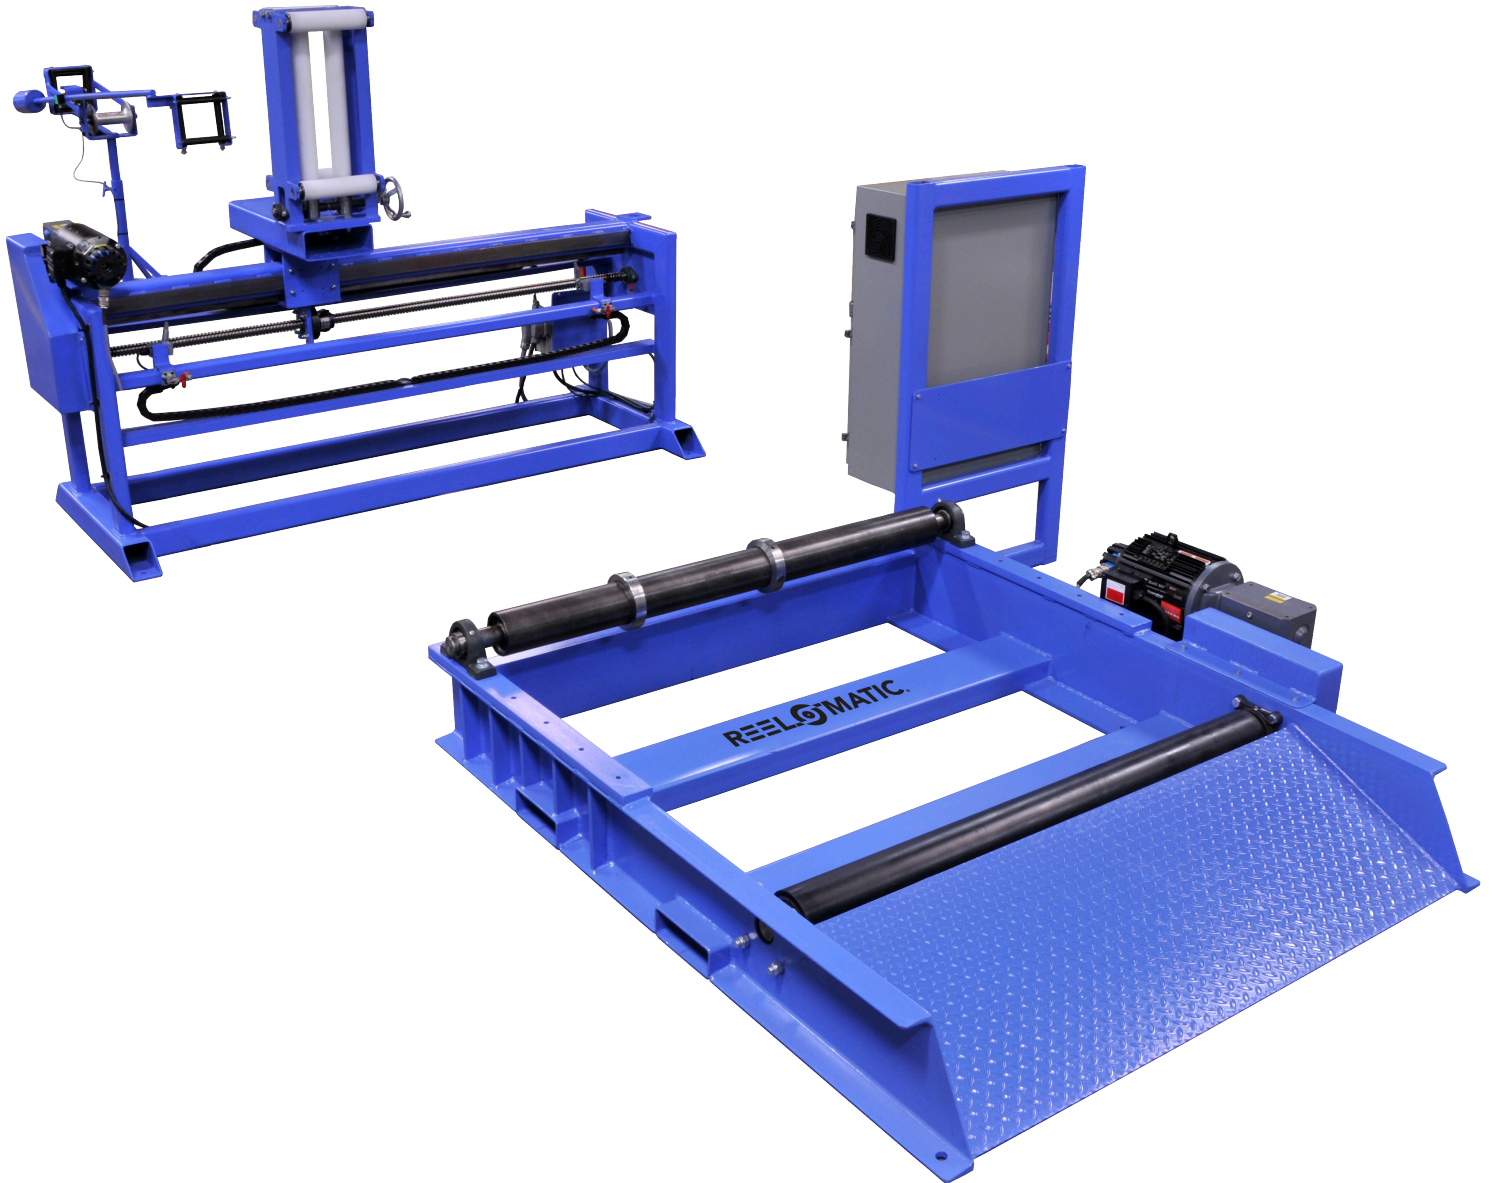

Shown above is our IL-PRR10 with an Automatic Material Levelwind and Dancer Speed Control to Synchronize with an Extrusion Process.

REELOMATIC[®]

The Leader in Reeling, Coiling & Processing Solutions

6408 S. Eastern Avenue | Oklahoma City, OK. 73149
405.672.0000 | 405.672.7200 Fax
www.reelomatic.com

POWERED REEL ROLLERS

PRR Series

Standard Capacities

- PRR1 24" to 60" Dia. x 36" Wide x 1,000 Lb. Load Capacity.
1 HP SCR Variable Speed Drive,
120V 1 Ph., 0-450 RFPM.
- PRR10 To 72" Dia. x 60" Wide x 10,000 Lb. Load Capacity.
2HP SCR Variable Speed Drive,
230V 1 Ph., 0-20 RFPM.
- PRR20 To 96" Dia. x 60" Wide x 20,000 Lb. Load Capacity.
3HP SCR Variable Speed Drive,
230V 1 Ph., 0-20 RFPM.


Standard Features

- Adjustable manually for various reel diameters.
Customers must specify 4 reel dia. settings.
- Bolt Down Tabs
- Operates in Forward or Reverse
- Urethane Coated Drive Roller
- Loading Ramp
- Pendant Controlled

Other Speed Ranges and Drives Available.

Other Models Available to 40,000 Lb. Capacity.

Consult Us About Your Special Applications.

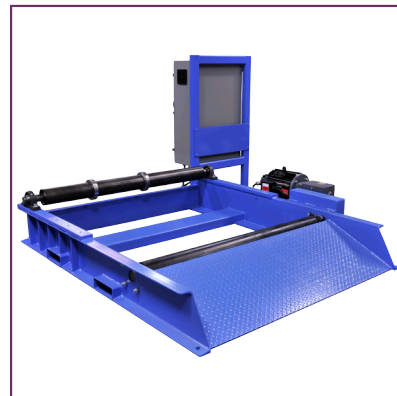

Standard PRR10



Optional Automatic Levelwind



Optional Dancer Speed Control

REELOMATIC

The Leader in Reeling, Coiling & Processing Solutions

6408 S. Eastern Avenue | Oklahoma City, OK. 73149
405.672.0000 | 405.672.7200 Fax
www.reelomatic.com