


RIM DRIVE SHAFTLESS TAKE-UPS

Fast, Efficient and Economical

Our new “AC” drives deliver:

- Smoother acceleration and deceleration - “no popping”, reduces risk of damaging strands!
- Torque output is constant through all speed ranges.
- VFD speed control is more easily adjusted reducing service challenges!
- Lower ambient noise level than mechanically driven units!
- Footswitch can be “jogged” without tripping the drive - allowing for easy packaging of material.
- Dynamic braking of reel, reducing “over spin”.
- Lower maintenance, higher performance reliability - more “up” time, more production!

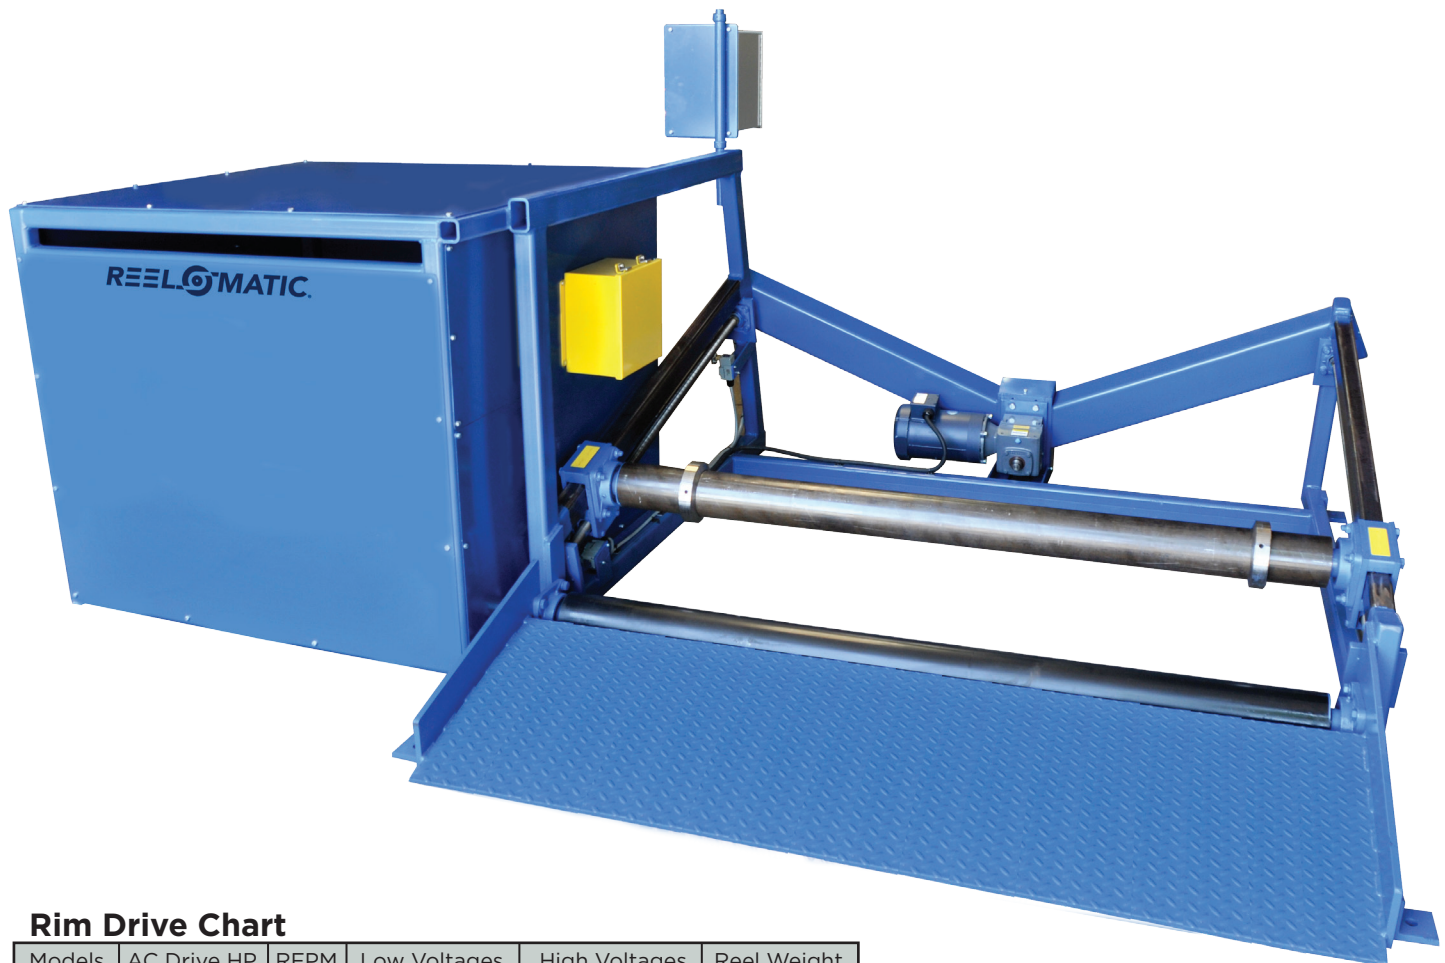

RD10 shown above

Rim Drive Chart

Models	AC Drive HP	RFPM	Low Voltages	High Voltages	Reel Weight
RDT5	10 HP	650	208/230/240	440/460/480	5,000 LB
RDT10	20 HP	650	208/230/241	440/460/481	10,000 LB
RDT15	25 HP	650	208/230/242	440/460/482	15,000 LB

REELOMATIC®

The Leader in Reeling, Coiling & Processing Solutions

6408 S. Eastern Avenue | Oklahoma City, OK. 73149
405.672.0000 | 405.672.7200 Fax
www.reelomatic.com

RIM DRIVE SHAFTLESS TAKE-UPS

Fast, Efficient and Economical

Choice of Drives Suited to Your Application

- 10HP to 25HP
- Yaskawa AC Vector VFD Drives

Standard Reel Capacities

- RD5** 16" to 84" diameter x 52" wide x 5,000 lbs.
- RD10** 16" to 108" diameter x 60" wide x 10,000 lbs.
- RD15** 16" to 120" diameter x 72" wide x 15,000 lbs.

Take-Up Options


- Levelwind
- Coiling Attachment
- Powered and Non-Powered Mobility Feature
- Predetermined Stop-to-Length Counters
- Coiler Guarding



Fast/Slow Remote Pendant Control



Optional Coiling Attachment

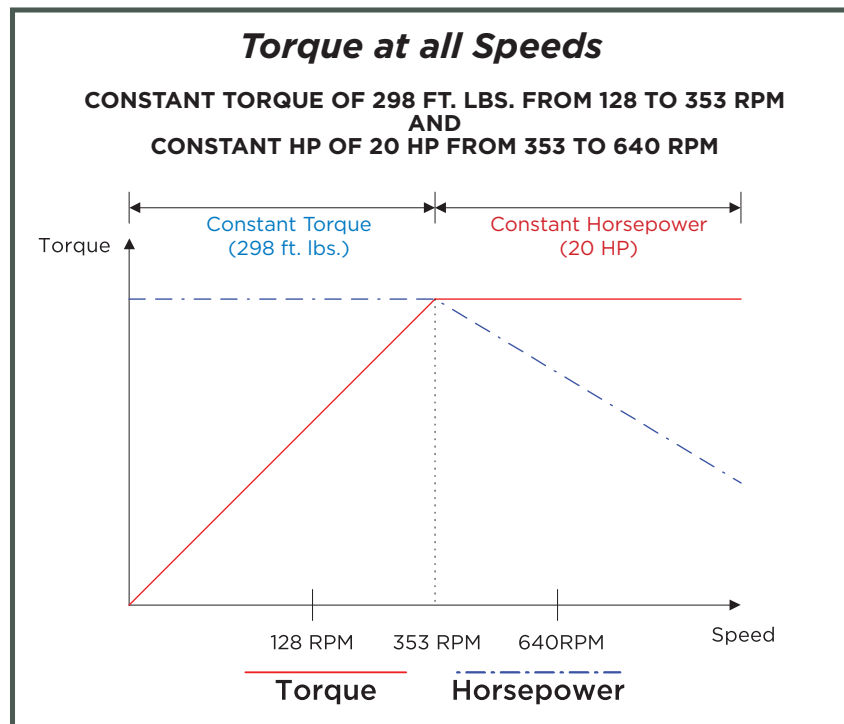

UL Certified Panel Box

REEL-O-MATIC

The Leader in Reeling, Coiling & Processing Solutions

6408 S. Eastern Avenue | Oklahoma City, OK. 73149
405.672.0000 | 405.672.7200 Fax
www.reelomatic.com