


RS TAKE-UP & PAY-OUT SERIES

Stationary Reeling and Coiling Machinery

Shafted / Shaftless Take Up

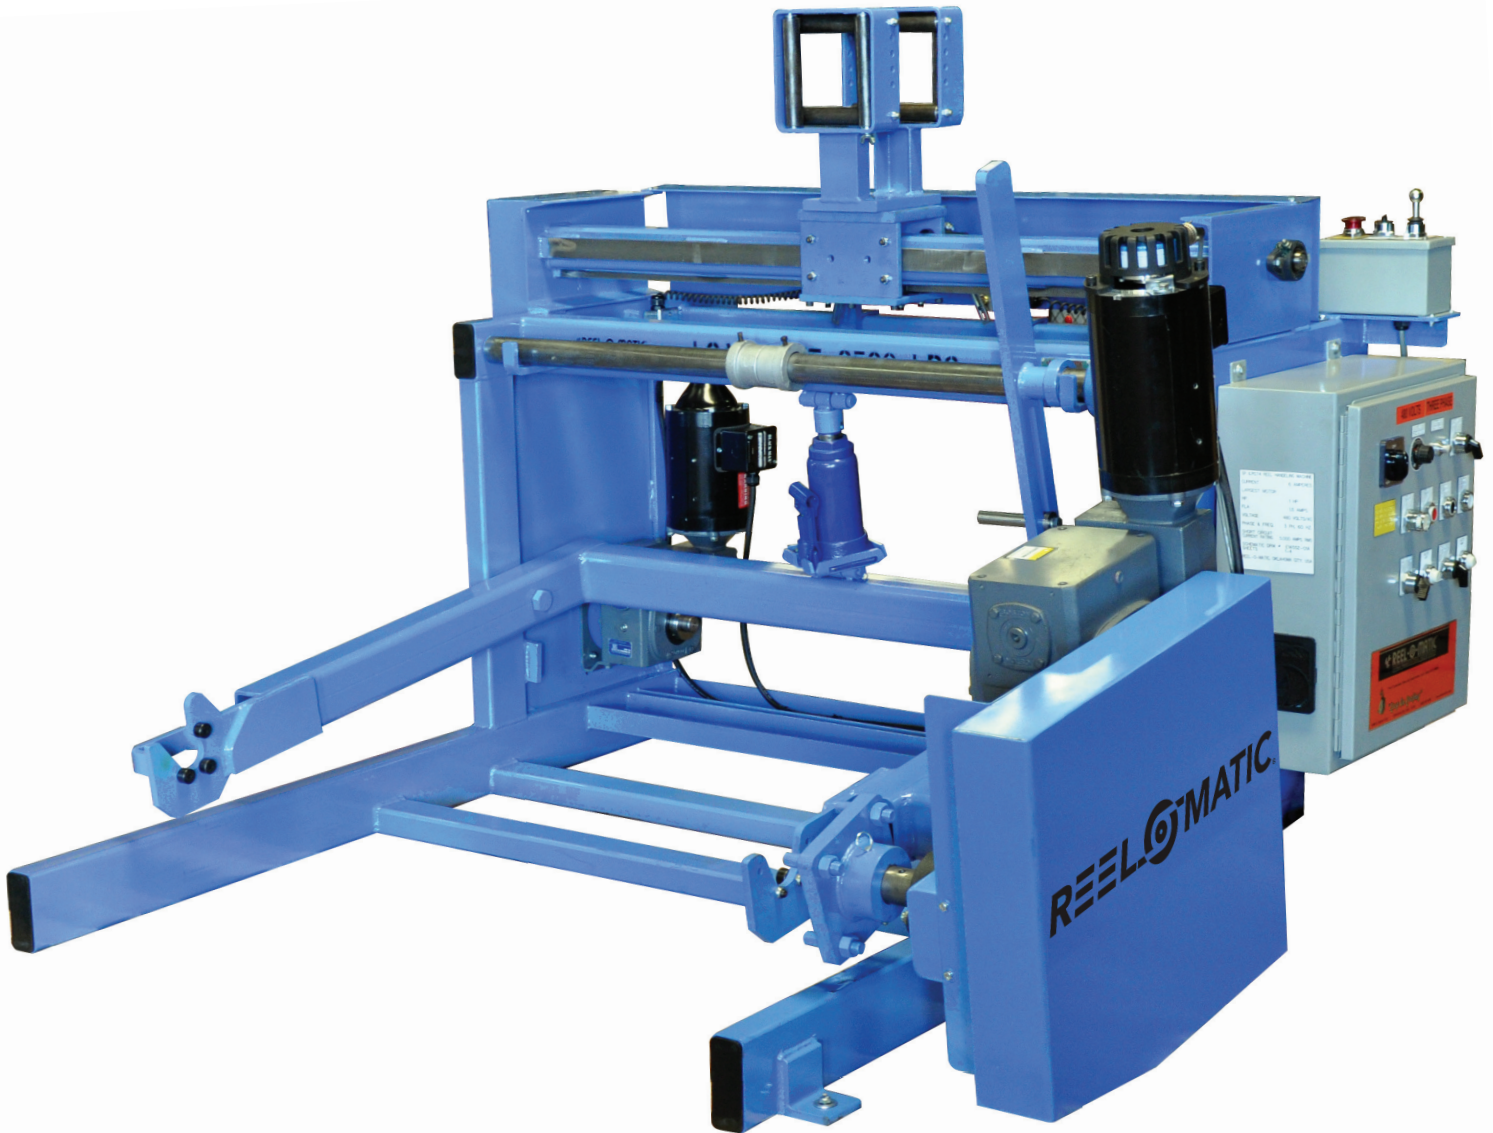

RST3N Model Shown Above is Shafted

REELOMATIC[®]

The Leader in Reeling, Coiling & Processing Solutions

6408 S. Eastern Avenue | Oklahoma City, OK. 73149
405.672.0000 | 405.672.7200 Fax
www.reelomatic.com

RS TAKE-UP & PAY-OUT SERIES

Stationary Reeling and Coiling Machinery

Standard Reel Capacities:

TAKE-UP

RST3N	30" to 60" dia., 34" wide X 3,000 lbs.
RST4N	30" to 60" dia., 36" wide X 4,000 lbs.
RST5	36" to 72" dia., 45" wide X 5,000 lbs.

PAY-OUT

RSP	20" to 48" dia., 36" wide X 2,500 lbs.
RSP3N	20" to 54" dia., 54" wide X 3,000 lbs.
RSP4N	30" to 60" dia., 38" wide X 4,000 lbs.
RSP5	38" to 72" dia., 48" wide X 5,000 lbs.

1HP to 3HP mechanical, 3HP to 20HP hydraulic and 1HP to 5HP SCR drives are available

Options:


- Manual Slide Traverse
- Slide Drive
- Coiling Attachments
- Manual Shaftless Feature
- Coiler Guards
- Integral Cutter
- Tension Brakes
- Dancer Speed Control
- Measuring Meter
- Soft Starts
- Automatic Levelwind
- ElectroLift (Electric/Hydraulic Reel Lifting)
- Predetermined and Stop-to-Length Counter - ESTL
- Take-Up Tension Control
- Custom Options as Required



RSP5 - Shaftless Pay-Off



SP/RSP - Shaftless Pay-Off

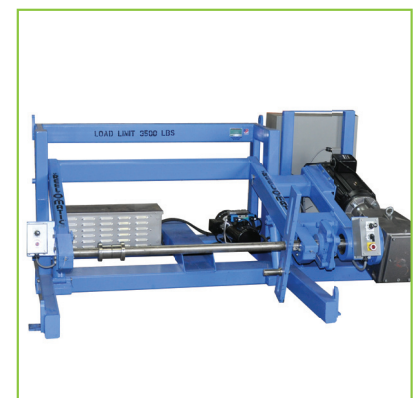

RST/TU - Shafted Take-Up

REELOMATIC[®]

The Leader in Reeling, Coiling & Processing Solutions

6408 S. Eastern Avenue | Oklahoma City, OK. 73149
405.672.0000 | 405.672.7200 Fax
www.reelomatic.com