


# FIVE COMPARTMENT REEL

RPR-55, RPR-55-06

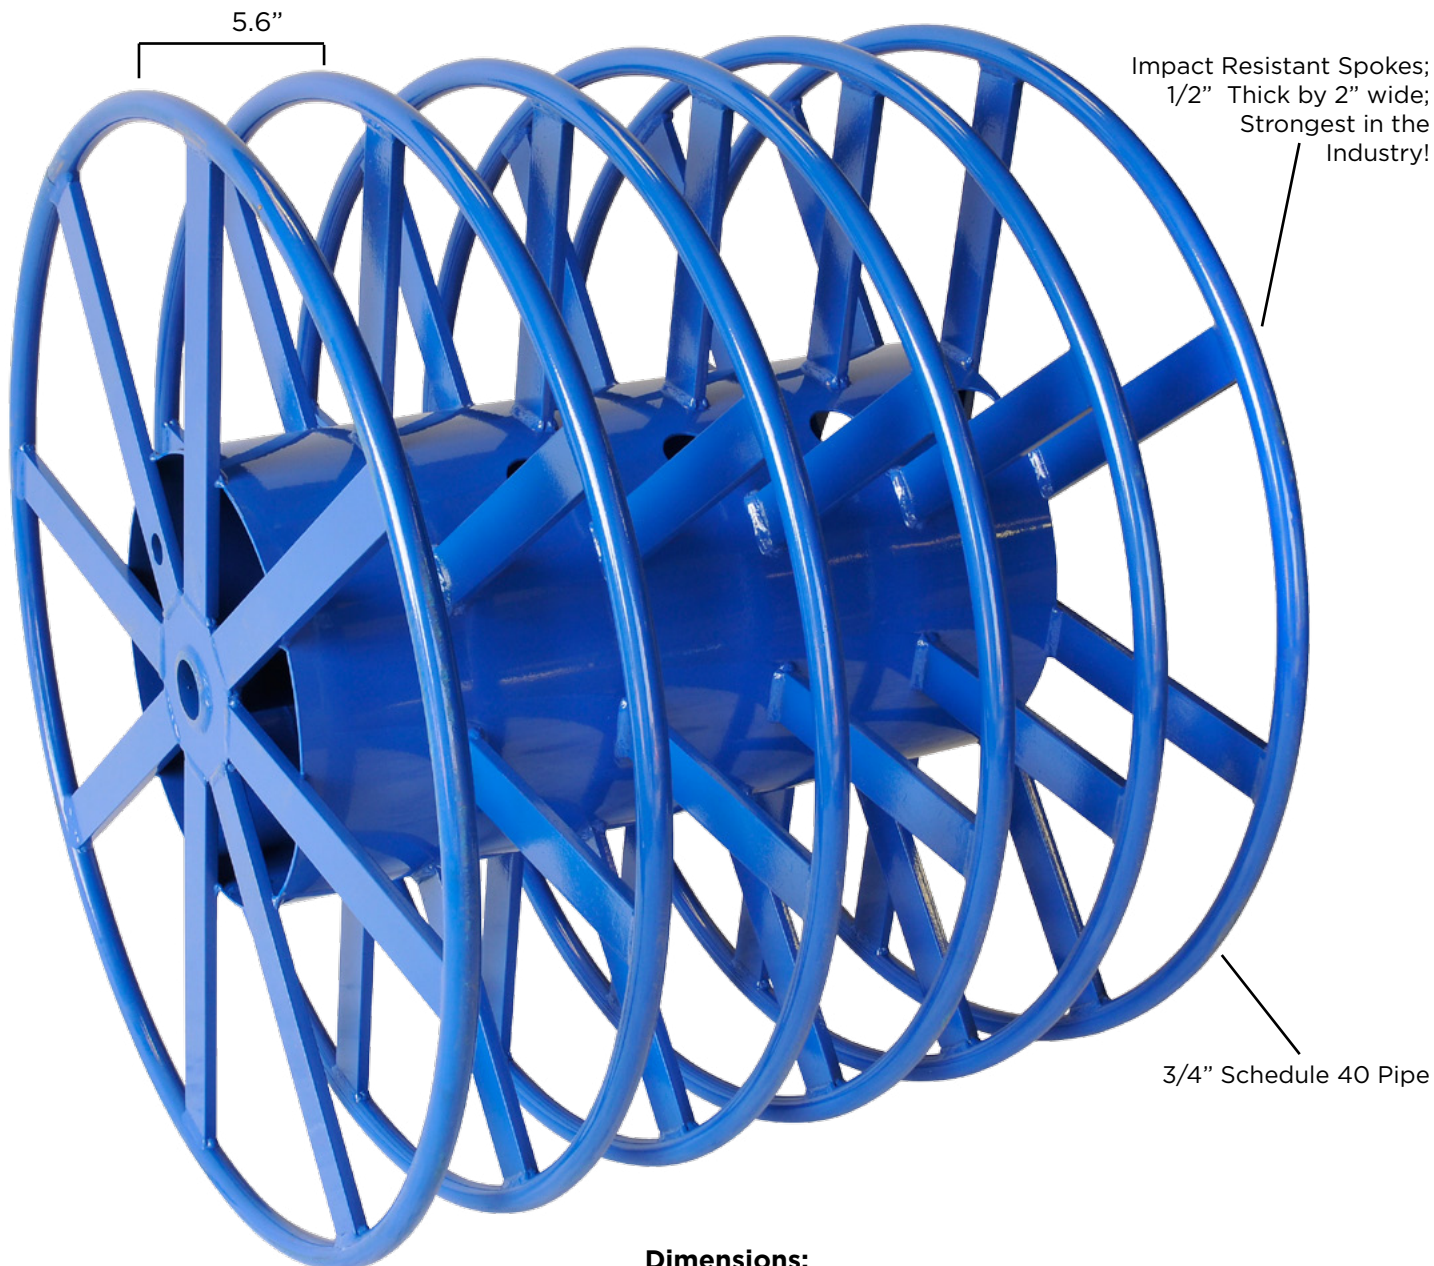

**Dimensions:**

**40" O.D. x 16" I.D. x 32" W (Part Number RPR-55)**

**48" O.D. x 16" I.D. x 32" W (Part Number RPR-55-06)**

**REELMATIC®**

The Leader in Reeling, Coiling & Processing Solutions

6408 S. Eastern Avenue | Oklahoma City, OK. 73149  
405.672.0000 | 405.672.7200 Fax  
www.reelomatic.com

# CABLE REEL STAND COMBO

## Forklift Pickup

The Reel-O-Matic Combo is constructed of all tubular welded steel. Our stands are complete with a 2" diameter solid steel shaft, cam roller bearings that allow for easy reel payout, shaft safety locks with locking pin and a maximum reel weight of 5,000 lbs. Load the reel(s) at your facility and deliver right to the job-site.

Popular Reel Configurations			
8x	RPR-15-14	Single Compartment Reel Measuring	40" OD x 16" ID x 4" W
4x	RPR-15	Single Compartment Reel Measuring	40" OD x 16" ID x 8" W
5x	RPR-15-01	Single Compartment Reel Measuring	40" OD x 16" ID x 6" W
1x	RPR-25	Two Compartment Reel Measuring	40" OD x 16" ID x 32" W
1x	RPR-35-002	Three Compartment Reel Measuring	40" OD x 16" ID x 24" W
1x	RPR-15	Single Compartment Reel Measuring	40" OD x 16" ID x 8" W
1x	RPR-45	Three Compartment Reel Measuring	40" OD x 16" ID x 32" W
1x	RPR-45-01	Four Compartment Reel Measuring	40" OD x 16" ID x 26" W
1x	RPR-15-01	Single Compartment Reel Measuring	40" OD x 16" ID x 6" W
1x	RPR-55	Five Compartment Reel Measuring	40" OD x 16" ID x 32" W
4x	RPR-15-06	Single Compartment Reel Measuring	48" OD x 16" ID x 8" W
5x	RPR-15-08	Single Compartment Reel Measuring	48" OD x 16" ID x 6" W
1x	RPR-35-004	Four Compartment Reel Measuring	48" OD x 16" ID x 24" W
1x	RPR-15-06	Single Compartment Reel Measuring	48" OD x 16" ID x 8" W
1x	RPR-35-007	Three Compartment Reel Measuring	48" OD x 16" ID x 32" W
1x	RPR-45-04	Four Compartment Reel Measuring	48" OD x 16" ID x 26" W
1x	RPR-15-08	Single Compartment Reel Measuring	48" OD x 16" ID x 6" W
1x	RPR-48-07	Four Compartment Reel Measuring	48" OD x 16" ID x 32" W
1x	RPR-55-06	Five Compartment Reel Measuring	48" OD x 16" ID x 32" W



*Standard 2 1/8" Locking Reel Collar*

Approximate Reel Capacity Chart					
THHN		RPR - 15	RPR - 15	RPR - 45	RPR - 45
Wire Size	OD in Inches	40" Diameter	48" Diameter	40" Diameter	48" Diameter
750 MCM	1.16"	341'	358'	341'	448'
600 MCM	1.06"	409'	437'	409'	546'
500 MCM	0.925"	537'	592'	537'	740'
400 MCM	0.842"	665'	715'	665'	894'
350 MCM	0.796"	716'	798'	716'	998'
300 MCM	0.747"	806'	904'	806'	1130'
250 MCM	0.694"	979'	1048'	979'	1310'
4/0	0.624"	1152'	1238'	1152'	1547'
3/0	0.568"	1478'	1494'	1478'	1867'
2/0	0.518"	1913'	1796'	1913'	2245'
1/0	0.474"	2150'	2145'	2150'	2681'



*Standard Shaft Safety Locks*



The Leader in Reeling, Coiling & Processing Solutions

6408 S. Eastern Avenue | Oklahoma City, OK. 73149  
 405.672.0000 | 405.672.7200 Fax  
 www.reelomatic.com