


FOUR COMPARTMENT REEL

RPR-45

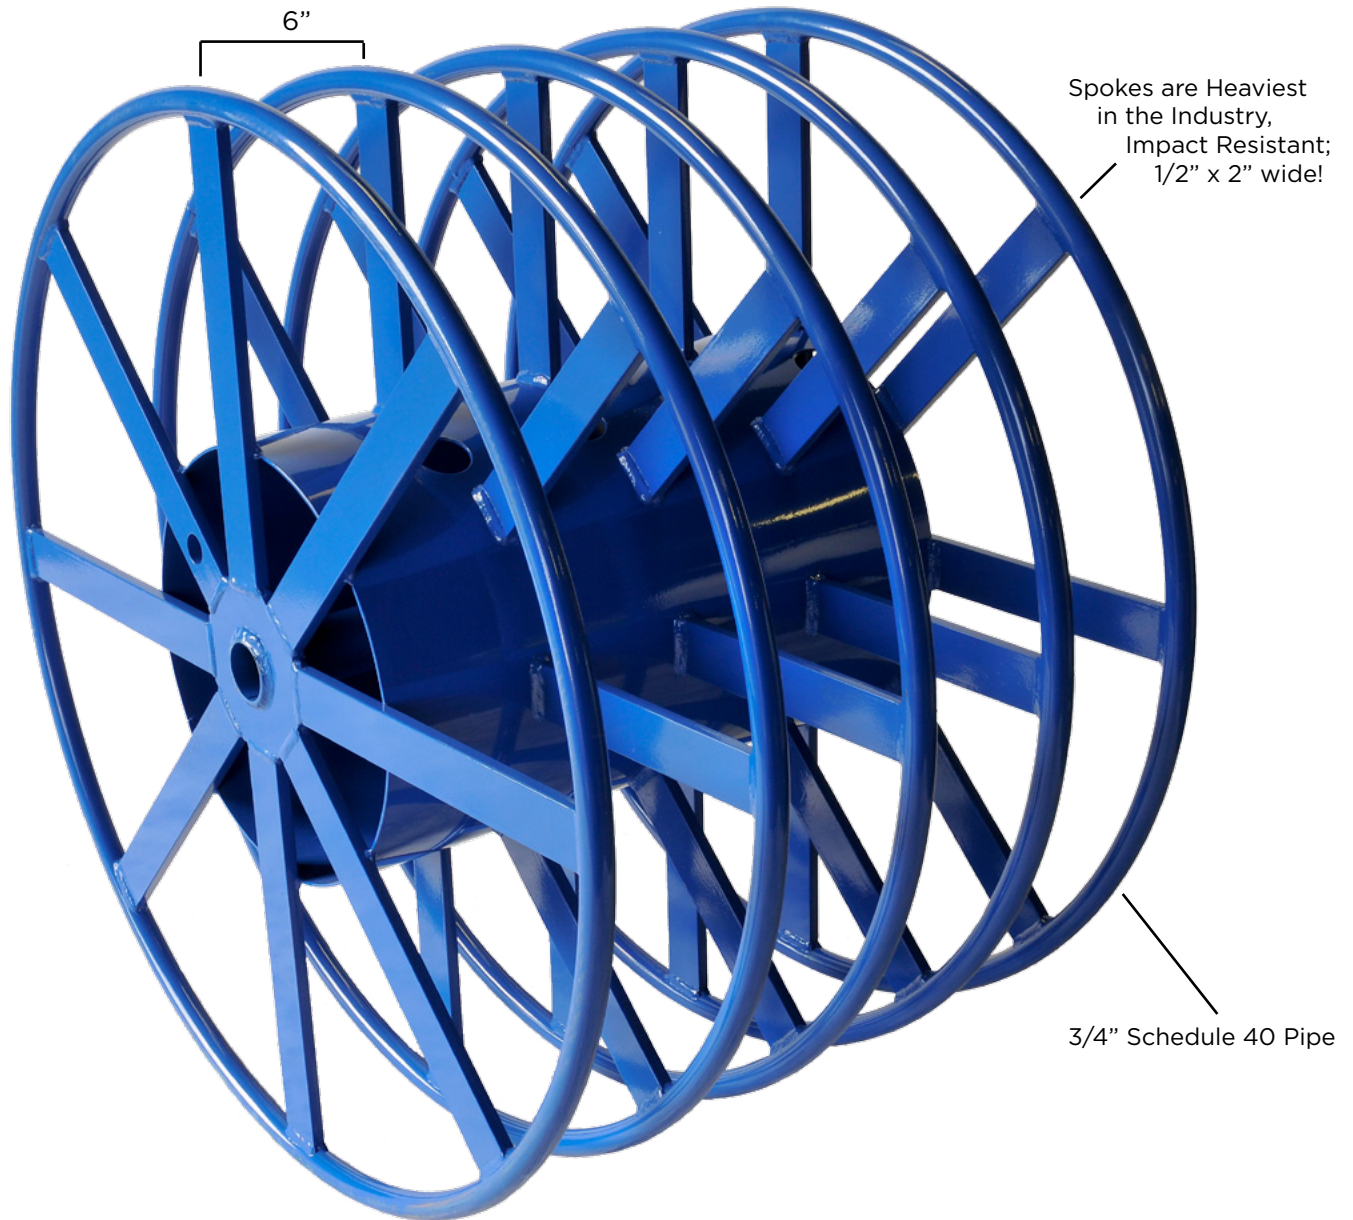

Dimensions:
40" O.D. x 16" I.D. x 26" W
48" O.D. x 16" I.D. x 26" W

REELMATIC

The Leader in Reeling, Coiling & Processing Solutions

6408 S. Eastern Avenue | Oklahoma City, OK. 73149
405.672.0000 | 405.672.7200 Fax
www.reelomatic.com

CABLE REEL STAND COMBO

Forklift Pickup

The Reel-O-Matic Combo is constructed of all tubular welded steel. Our stands are complete with a 2" diameter solid steel shaft, cam roller bearings that allow for easy reel payout, shaft safety locks with locking pin and a maximum reel weight of 5,000 lbs. Load the reel(s) at your facility and deliver right to the job-site.

| Popular Reel Configurations | | | |
|-----------------------------|-------------------------|---|---|
| 8x | RPR-15-14 | Single Compartment Reel Measuring | 40" OD x 16" ID x 4" W |
| 4x | RPR-15 | Single Compartment Reel Measuring | 40" OD x 16" ID x 8" W |
| 5x | RPR-15-01 | Single Compartment Reel Measuring | 40" OD x 16" ID x 6" W |
| 1x | RPR-25 | Two Compartment Reel Measuring | 40" OD x 16" ID x 32" W |
| 1x 1x | RPR-35-002 RPR-15 | Three Compartment Reel Measuring Single Compartment Reel Measuring | 40" OD x 16" ID x 24" W 40" OD x 16" ID x 8" W |
| 1x | RPR-45 | Three Compartment Reel Measuring | 40" OD x 16" ID x 32" W |
| 1x 1x | RPR-45-01 RPR-15-01 | Four Compartment Reel Measuring Single Compartment Reel Measuring | 40" OD x 16" ID x 26" W 40" OD x 16" ID x 6" W |
| 1x | RPR-55 | Five Compartment Reel Measuring | 40" OD x 16" ID x 32" W |
| 4x | RPR-15-06 | Single Compartment Reel Measuring | 48" OD x 16" ID x 8" W |
| 5x | RPR-15-08 | Single Compartment Reel Measuring | 48" OD x 16" ID x 6" W |
| 1x 1x | RPR-35-004 RPR-15-06 | Four Compartment Reel Measuring Single Compartment Reel Measuring | 48" OD x 16" ID x 24" W 48" OD x 16" ID x 8" W |
| 1x | RPR-35-007 | Three Compartment Reel Measuring | 48" OD x 16" ID x 32" W |
| 1x 1x | RPR-45-04 RPR-15-08 | Four Compartment Reel Measuring Single Compartment Reel Measuring | 48" OD x 16" ID x 26" W 48" OD x 16" ID x 6" W |
| 1x | RPR-48-07 | Four Compartment Reel Measuring | 48" OD x 16" ID x 32" W |
| 1x | RPR-55-06 | Five Compartment Reel Measuring | 48" OD x 16" ID x 32" W |



Standard 2 1/8" Locking Reel Collar

| Approximate Reel Capacity Chart | | | | | |
|---------------------------------|--------------|--------------|--------------|--------------|--------------|
| THHN | | RPR - 15 | | RPR - 45 | |
| Wire Size | OD in Inches | 40" Diameter | 48" Diameter | 40" Diameter | 48" Diameter |
| 750 MCM | 1.16" | 341' | 358' | 341' | 448' |
| 600 MCM | 1.06" | 409' | 437' | 409' | 546' |
| 500 MCM | 0.925" | 537' | 592' | 537' | 740' |
| 400 MCM | 0.842" | 665' | 715' | 665' | 894' |
| 350 MCM | 0.796" | 716' | 798' | 716' | 998' |
| 300 MCM | 0.747" | 806' | 904' | 806' | 1130' |
| 250 MCM | 0.694" | 979' | 1048' | 979' | 1310' |
| 4/0 | 0.624" | 1152' | 1238' | 1152' | 1547' |
| 3/0 | 0.568" | 1478' | 1494' | 1478' | 1867' |
| 2/0 | 0.518" | 1913' | 1796' | 1913' | 2245' |
| 1/0 | 0.474" | 2150' | 2145' | 2150' | 2681' |



Standard Shaft Safety Locks



The Leader in Reeling, Coiling & Processing Solutions

6408 S. Eastern Avenue | Oklahoma City, OK. 73149
405.672.0000 | 405.672.7200 Fax
www.reelomatic.com