
## CRS/RPR COMBO

## CRS-48-035, RPR-45



Standard Combo Paralleling Cable Reel Stand, includes a four compartment model RPR 45 measuring 40" O.D. x 16" I.D. x 32" wide. Includes 2" O.D. shaft with 2 1/8" locking collars and safety latches. Also includes forklift base bar.

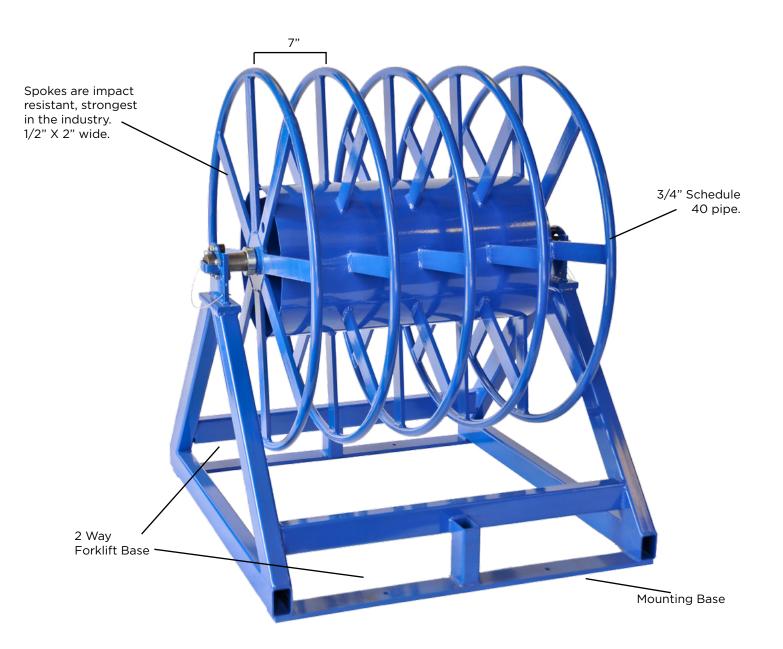

## CABLE REEL STAND COMBO

## Forklift Pickup

The Reel-O-Matic Combo is constructed of all tubular welded steel. Our stands are complete with a 2" diameter solid steel shaft, cam roller bearings that allow for easy reel payout, shaft safety locks with locking pin and a maximum reel weight of 5,000 lbs. Load the reel(s) at your facility and deliver right to the job-site.

| Popular Reel Configurations |                         |   |   |  |  |  |  |
|-----------------------------|-------------------------|---|---|--|--|--|--|
| 8x                          | RPR-15-14               | Single Compartment Reel Measuring                                     | 40" OD x 16" ID x 4" W  |  |  |  |  |
| 4x                          | RPR-15                  | Single Compartment Reel Measuring                                     | 40" OD x 16" ID x 8" W  |  |  |  |  |
| 5x                          | RPR-15-01               | Single Compartment Reel Measuring                                     | 40" OD x 16" ID x 6" W  |  |  |  |  |
| 1x                          | RPR-25                  | Two Compartment Reel Measuring  | 40" OD x 16" ID x 32" W   |  |  |  |  |
| 1x<br>1x                    | RPR-35-002<br>RPR-15    | Three Compartment Reel Measuring<br>Single Compartment Reel Measuring | 40" OD x 16" ID x 24" W<br>40" OD x 16" ID x 8" W               |  |  |  |  |
| 1x                          | RPR-45                  | Three Compartment Reel Measuring                                      | 40" OD x 16" ID x 32" W   |  |  |  |  |
| 1x<br>1x                    | RPR-45-01<br>RPR-15-01  | Four Compartment Reel Measuring<br>Single Compartment Reel Measuring  | <b>40" OD</b> x 16" ID x 26" W<br><b>40" OD</b> x 16" ID x 6" W |  |  |  |  |
| 1x                          | RPR-55                  | Five Compartment Reel Measuring                                       | 40" OD x 16" ID x 32" W   |  |  |  |  |
| 4x                          | RPR-15-06               | Single Compartment Reel Measuring                                     | 48" OD x 16" ID x 8" W  |  |  |  |  |
| 5x                          | RPR-15-08               | Single Compartment Reel Measuring                                     | 48" OD x 16" ID x 6" W  |  |  |  |  |
| 1x<br>1x                    | RPR-35-004<br>RPR-15-06 | Four Compartment Reel Measuring<br>Single Compartment Reel Measuring  | 48" OD x 16" ID x 24" W<br>48" OD x 16" ID x 8" W               |  |  |  |  |
| 1x                          | RPR-35-007              | Three Compartment Reel Measuring                                      | 48" OD x 16" ID x 32" W   |  |  |  |  |
| 1x<br>1x                    | RPR-45-04<br>RPR-15-08  | Four Compartment Reel Measuring<br>Single Compartment Reel Measuring  | <b>48" OD</b> x 16" ID x 26" W<br><b>48" OD</b> x 16" ID x 6" W |  |  |  |  |
| 1x                          | RPR-48-07               | Four Compartment Reel Measuring                                       | 48" OD x 16" ID x 32" W   |  |  |  |  |
| 1x                          | RPR-55-06               | Five Compartment Reel Measuring                                       | 48" OD x 16" ID x 32" W   |  |  |  |  |

| Approximate Reel Capacity Chart |              |              |              |              |              |  |  |
|---------------------------------|--------------|--------------|--------------|--------------|--------------|--|--|
| THHN                            |              | RPR - 15     | RPR - 15     | RPR - 45     | RPR - 45     |  |  |
| Wire Size                       | OD in Inches | 40" Diameter | 48" Diameter | 40" Diameter | 48" Diameter |  |  |
| 750 MCM                         | 1.16"        | 341′         | 358′         | 341′         | 448′         |  |  |
| 600 MCM                         | 1.06"        | 409′         | 437'         | 409′         | 546′         |  |  |
| 500 MCM                         | 0.925"       | 537′         | 592′         | 537′         | 740′         |  |  |
| 400 MCM                         | 0.842"       | 665′         | 715′         | 665′         | 894′         |  |  |
| 350 MCM                         | 0.796"       | 716′         | 798′         | 716′         | 998′         |  |  |
| 300 MCM                         | 0.747"       | 806′         | 904′         | 806′         | 1130′        |  |  |
| 250 MCM                         | 0.694"       | 979′         | 1048′        | 979′         | 1310′        |  |  |
| 4/0                             | 0.624"       | 1152′        | 1238′        | 1152′        | 1547′        |  |  |
| 3/0                             | 0.568"       | 1478′        | 1494′        | 1478′        | 1867′        |  |  |
| 2/0                             | 0.518"       | 1913′        | 1796′        | 1913′        | 2245′        |  |  |
| 1/0                             | 0.474"       | 2150′        | 2145′        | 2150′        | 2681′        |  |  |



Standard 2 1/8" Locking Reel Collar



Standard Shaft Safety Locks



Available on Certain Models

